

# Cordage Measurer

**1430; Feet      1440; Metres**


Conforms to Weights & Measures specifications in U.S.A. and Canada.

Measurer accommodates ropes and cordage from 1/4" to 3/4" (6 to 20 mm) diameter.

Cordage is visible and accessible during its travel through Measurer. The toothed Measuring Wheel and Stainless Steel Pressure Shoe assure uninterrupted NO SLIP contact with cordage. Digital Counter adds or subtracts. Resets to ZERO with one turn of knob. Model 1430 indicates to 9,999'-11"; No. 1440 to 999.9 Metres.

Measurer should be firmly mounted for optimum accuracy. Height is 8-5/16"; width from ring to ring is 10-1/2".


Shpg. Wt. 1430 or 1440 . . . . . 4 lbs. (1.8 kg)

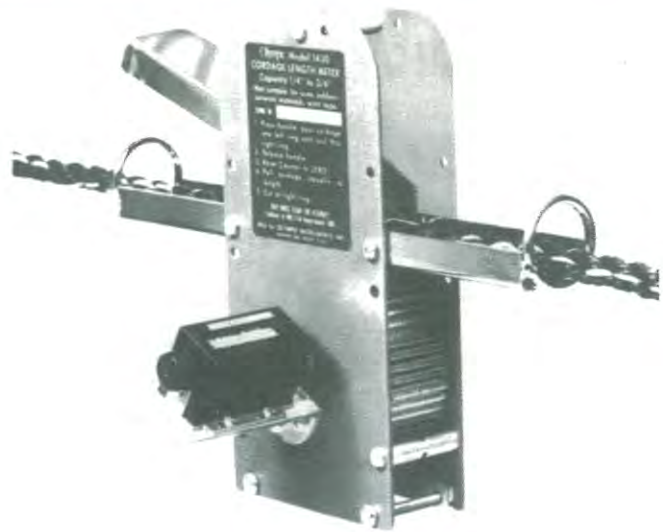

## Cord Measurer 1450

With three guide tubes and a pressure roller, Model 1450 provides accurate measurement of small diameter natural and synthetic fibre cords in sizes 1/16" to 1/2" (1.5 to 12.7 mm). All other specifications are identical to Model 1430 above.

Shpg. Wt. . . . . 5 lbs. (2.3 kg)

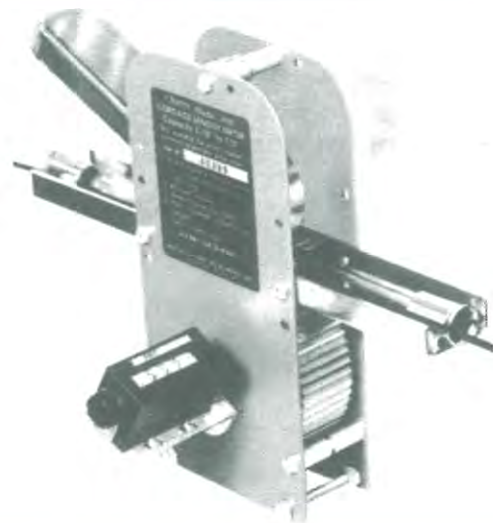

## Measurer Mounts

TO ASSURE GREATER ACCURACY FROM MEASURERS, MOUNT FIRMLY TO A FLAT, HORIZONTAL SURFACE USING AN OLYMPIC STAND (201 at left) OR ONE OF THE UNITS BELOW. MOUNTS ACCOMMODATE ALL SERIES 1400 MEASURERS.



**Mount 357**



**Measurer Mount 359**



**Wall or Post Bracket 366**

MODEL 357: Wing Nut allows pivoting so that Measurer can be stored out of the way when not in use. Extends 7-1/2".  
Wt. . . . . 1 lb. (.46 kg)

MODEL 359: Can be welded, bolted or riveted to your rack or stand.  
Wt. . . . . 8 oz. (.23 kg)

MODEL 366: Mounts Measurer to vertical surface. Customer furnishes 5/16" (8 mm) bolts or lags.  
Wt. . . . . 2 lbs. (.9 kg)



## Hot Knife 1455

Soldering gun TIP melts & seals ends of synthetic rope to 3/4". Takes up to 24 sec. on first cut. Fits WEN Mod. 100, 199; WELLER 8200 (since 1/86) and guns with similar connections.  
Shpg. Wt. . . . . 3 oz. (.14 kg)