

MEGOHMMETERS

DIGITAL/ANALOG & MULTI-FUNCTION HANDHELD

MODELS 6522, 6524, 6526, 6532, 6534 & 6536



DataView®

6526, 6532 & 6534 (only)



SPECIFICATIONS

MODELS	6522	6524	6526	6532	6534	6536
INSULATION TESTS						
Test Voltages	250V, 500V, 1000V	50V, 100V, 250V, 500V, 1000V		50V, 100V	10V, 25V, 100V, 250V, 500V	Variable 10 to 100V (1V steps)
Insulation Resistance	40GΩ (40,000MΩ)	200GΩ (200,000MΩ)		20GΩ (20,000MΩ)	50GΩ (50,000MΩ)	20GΩ (20,000MΩ)
PI/DAR Ratios	No		Yes			No
Test Lock				Yes		
Timer				0 to 40min		
Auto Discharge				Yes		
Automatic Test Inhibit				>25V		
DMM FUNCTIONS						
Voltage				700V _{AC} /dc		
Resistance	-				1000kΩ	
Continuity	10Ω				10Ω, 100Ω	
Test Current				200mA		
Capacitance Measurement		-		0.1n to 10μF		-
Frequency			15.3 to 800Hz			-
GENERAL FUNCTIONS						
Alarm / Δ Rel	No / No			Yes / Yes		
Auto Power OFF						
Data Hold				Yes		
Test Lead Compensation						
Remote Probe				Yes (optional)		
Memory	-	300 measurements		1300 measurements		-
Bluetooth		-		2.1 Class II		-
DataView® Software		-		Included		-
Display Type				Digital w/Analog Bargraph		
Display Counts				4000		
Backlight				Yes		
Power Supply				6 x AA Alkaline		
Magnetic Mount				Yes		
Applications		Industrial Maintenance		Telecom	Electronics	Avionics, Space, Defense, ESD
SAFETY						
Safety Rating				600V CAT IV		
Ingress Protection				IP54 / IK 04		

Consult factory for NIST Calibration prices

CATALOG NO.	DESCRIPTION
2155.51	Megohmmeter Model 6522 (Digital w/Analog Bargraph, 250V, 500V, 1000V, Continuity, V)
2155.52	Megohmmeter Model 6524 (Digital w/Analog Bargraph, Alarm, 50V, 100V, 250V, 500V, 1000V, Ohm, Continuity, V, kΩ, Memory)
2155.53	Megohmmeter Model 6526 (Digital w/Analog Bargraph, Alarm, 50V, 100V, 250V, 500V, 1000V, Ohm, Continuity, V, kΩ, Capacitance, Memory, Bluetooth w/DataView® software)
2155.54	Megohmmeter Model 6532 (Digital w/Analog Bargraph, Alarm, 50V, 100V, Ohm, Continuity, V, kΩ, Cap, Memory, Bluetooth w/DataView® software)
2155.55	Megohmmeter Model 6534 (Digital w/Analog Bargraph, Alarm, 10V, 25V, 100V, 250V, 500V, Ohm, Continuity, V, kΩ, Memory, Bluetooth w/DataView® software)
2155.56	Megohmmeter Model 6536 (Digital w/Analog Bargraph, Alarm, Variable 10 to 100V, Ohm, Continuity, V, kΩ)
2155.57	Megohmmeter Model 6536 ESD Floor Kit (Meter, set of 2, 5lb weights and carrying case)



Vol 21 Rev 01 07/2021

R9

1.800.561.8187

www.itm.com


information@itm.com

MEGOHMMETERS

DIGITAL/ANALOG & MULTI-FUNCTION HANDHELD

MODELS 6522, 6524, 6526, 6532, 6534 & 6536

FRONT PANEL & FUNCTIONAL DISPLAYS

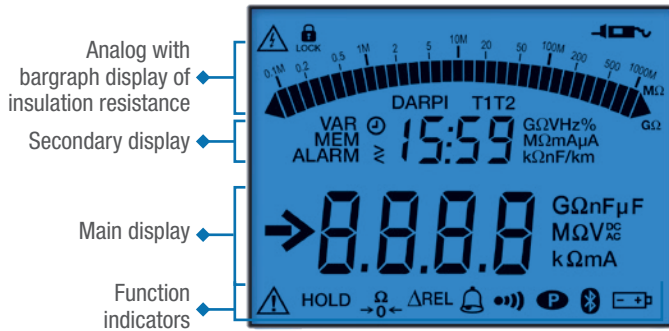

PRODUCT INCLUDES

6522 & 6524

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (6) AA batteries and a user manual.

6526

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (6) AA batteries, quick start guide, USB stick with DataView® software and a user manual.

6536

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (6) AA batteries, and a user manual.

6536 ESD FLOOR KIT

Field case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (2) 5 lb weights with conductive rubber bottom pad, (2) 4mm non-insulated adapters, (6) AA batteries, and a user manual.

6532 & 6534

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (6) AA batteries, quick start guide, USB stick with DataView® software and a user manual.

SHOWN: 6532



Access to the instrument information and setup for Test Lock, Timer, PI/DAR and Times

Navigation buttons:

- Display instrument information
- Turn buzzer ON or OFF
- Turn power saver ON or OFF
- Program test time
- Select displayed parameters
- Program alarm set points

Memory recall/Bluetooth activation

Alarm activation/deactivation with Pass/Fail indication (model dependent)



Test lead resistance compensation

ΔRel set and compare measurements to a reference value

Test button

Test function selection switch



DataView®

6526, 6532 & 6534

FEATURES*

- True Megohmmeter®
- Test voltage from 10 to 1000V
- Insulation resistance up to 200GΩ
- Manual, Lock, Timer modes & PI/DAR Ratio calculations
- Alarms with Green/Red Pass/Fail indicator light
- 200mA/20mA continuity with active protection without fuses
- Measurement of V (TRMS & DC), F, Ω, kΩ, Hz, C and cable length
- ΔRel mode for comparison measurements
- Configurable alarms
- Data retrieval
- Automatic discharge after test
- Automatic test inhibit if device under test is energized >25V

* Features are model dependent. Bluetooth on selected models.

MEGOHMMETERS

SELECTION CHART

AEMC MODEL NUMBER	AEMC CATALOG NUMBER	TEST VOLTAGE	INSULATION RANGE	RESISTANCE RANGE	CONTINUITY RANGE	CAPACITANCE RANGE	VOLTAGE DETECTION	POWER SOURCE	DISPLAY	DATAVIEW® SOFTWARE
6501	2126.51	500V	0.5 to 200MΩ	500kΩ	100Ω	—	600Vac	Hand-cranked	Analog	No
6503	2126.52	250V 500V 1000V	1 to 500MΩ 1 to 500MΩ 10 to 5000MΩ	—	—	—	600Vac	Hand-cranked	Analog	No
6527	2126.53	250V 500V 1000V	1kΩ to 4GΩ 1kΩ to 4GΩ 1kΩ to 4GΩ	400kΩ	400Ω	—	600Vac 1000Vdc	6 x AA Alkaline Batteries	Digital/ Analog	No
6522	2155.51	250V 500V 1000V	50kΩ to 10GΩ 100kΩ to 20GΩ 200kΩ to 40GΩ	—	10Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6528	2126.54	250V 500V 1000V	0.050MΩ to 4200MΩ 0.100MΩ to 4200MΩ 0.20MΩ to 11GΩ	0 to 420kΩ	0 to 40Ω (200mA test current ≤ 2Ω)	—	700Vac 700Vac/dc	6 x AA Alkaline Batteries	Digital	No
6529	2126.55	50V 100V 250V 500V 1000V	0.010MΩ to 420MΩ 0.020MΩ to 420MΩ 0.050MΩ to 420MΩ 0.100MΩ to 4200MΩ 0.20MΩ to 11GΩ	0 to 420kΩ	0 to 40Ω (200mA test current ≤ 2Ω)	—	700Vac 700Vac/dc	6 x AA Alkaline Batteries	Digital	No
6524	2155.52	50V 100V 250V 500V 1000V	10kΩ to 10GΩ 20kΩ to 20GΩ 50kΩ to 50GΩ 100kΩ to 100GΩ 200kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6526	2155.53	50V 100V 250V 500V 1000V	10kΩ to 10GΩ 20kΩ to 20GΩ 50kΩ to 50GΩ 100kΩ to 100GΩ 200kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6532	2155.54	50V 100V	10kΩ to 10GΩ 20kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6534	2155.55	10V 25V 100V 250V 500V	2kΩ to 1GΩ 5kΩ to 2GΩ 10kΩ to 10GΩ 50kΩ to 25GΩ 100kΩ to 50GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6536	2155.56	10V 100V	2kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6536 ESD Floor Kit	2155.57	(variable in 1V steps)								
1050	2130.01	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	400kΩ	40Ω	0.005 to 4.999μF	1000Vac/dc	8 x 1.5V C Cell Batteries	Digital/ Analog	No
1060	2130.03	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	400kΩ	40Ω	0.005 to 4.999μF	1000Vac/dc	Rechargeable NiMH Battery	Digital/ Analog	Yes
6505	2130.18	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	No
5050	2130.20	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	No
5060	2130.21	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes
5070	2130.30	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Graphic/ Digital	Yes
6550	2130.31	500V 1000V 2500V 5000V 10,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ	—	—	0.001 to 19.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes
6555	2130.32	500V 1000V 2500V 5000V 10,000V 15,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ 10kΩ to 30,000GΩ	—	—	0.001 to 19.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes

Consult factory for NIST Calibration prices