

# MEGOHMMETERS

## DIGITAL/ANALOG & MULTI-FUNCTION HANDHELD

### MODELS 6522, 6526, 6534 & 6536

*6522 & 6526 - ideal for testing cables, small motors, pumps, transformers and industrial equipment*

*6534 - ideal for insulation measurements on communication cables, Ethernet cables and other low voltage DC wiring*

*6536 - ideal for special applications in the aerospace and defense sectors and for ESD testing where specific test voltages are required*



6522

6526



6534



6536

## SPECIFICATIONS

MODELS	6522	6526	6534	6536
<b>INSULATION TESTS</b>				
Test Voltages	(250, 500, and 1000) V	(50, 100, 250, 500, and 1000) V	(10, 25, 100, 250, and 500) V	Variable (10 to 100) V (1 V steps)
Insulation Resistance	40 GΩ (40,000 MΩ)	200 GΩ (200,000 MΩ)	50 GΩ (50,000 MΩ)	20 GΩ (20,000 MΩ)
PI/DAR Ratios	No	Yes		No
Test Lock			Yes	
Timer			(0 to 40) min	
Auto Discharge			Yes	
Automatic Test Inhibit			> 25 V	
<b>DMM FUNCTIONS</b>				
Voltage			700 VAC/DC	
Resistance			1000 kΩ	
Continuity	10 Ω		10 Ω, 100 Ω	
Test Current			200 mA	
Capacitance Measurement		0.1 n to 10 μF		
Frequency		(15.3 to 800) Hz		
<b>GENERAL FUNCTIONS</b>				
Alarm / Δ Rel	No/No		Yes / Yes	
Auto Power OFF				
Data Hold			Yes	
Test Lead Compensation				
Remote Probe			Yes (optional)	
Memory		1300 measurements		
Bluetooth		2.1 Class II		
DataView® Software		Included		
Display Type		Digital w/Analog Bargraph		
Display Counts		4000		
Backlight		Yes		
Power Supply		(6) AA Alkaline		
Magnetic Mount		Yes		
<b>SAFETY</b>				
Safety Rating			600 V CAT IV	

Consult factory for NIST Calibration prices



**DataView®**  
6526 & 6534 (only)



CATALOG NO.	DESCRIPTION
2155.51	Megohmmeter Model 6522 (Digital w/Analog Bargraph, 250 V, 500 V, 1000 V, Continuity, V)
2155.53	Megohmmeter Model 6526 (Digital w/Analog Bargraph, Alarm, 50 V, 100 V, 250 V, 500 V, 1000 V, Ohm, Continuity, V, kΩ, Capacitance, Memory, Bluetooth w/DataView® software)
2155.55	Megohmmeter Model 6534 (Digital w/Analog Bargraph, Alarm, 10 V, 25 V, 100 V, 250 V, 500 V, Ohm, Continuity, V, kΩ, Memory, Bluetooth w/DataView® software)
2155.56	Megohmmeter Model 6536 (Digital w/Analog Bargraph, Alarm, Variable (10 to 100) V, Ohm, Continuity, V, kΩ)
2155.57	Megohmmeter Model 6536 ESD Floor Kit (Meter, set of (2) 5 lb weights and carrying case)




Vol. 23 Rev.00 02/2023

87

# MEGOHMMETERS

DIGITAL/ANALOG & MULTI-FUNCTION HANDHELD  
MODELS 6522, 6526, 6534 & 6536

## FRONT PANEL & FUNCTIONAL DISPLAYS

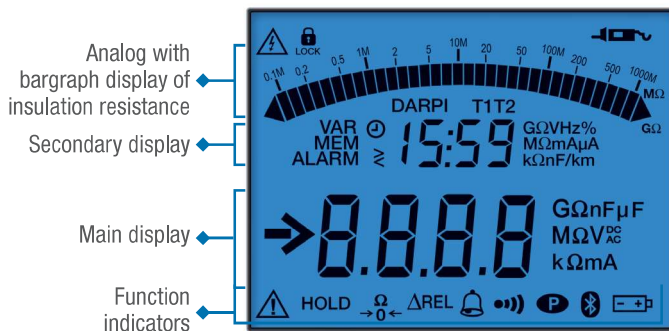

## PRODUCT INCLUDES

### 6522

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (6) AA batteries and user manual.

### 6526

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (6) AA batteries, quick start guide, USB stick with DataView® software and user manual.

### 6534

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (6) AA batteries, quick start guide, USB stick with DataView® software and user manual.

### 6536

Soft carrying case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (6) AA batteries, and user manual.

### 6536 ESD FLOOR KIT

Field case, (2) 5 ft color-coded (red/black) leads, (2) color-coded (red/black) alligator clips, (1) black test probe, (2) color-coded (red/black) grip probes, (2) 5 lb weights with conductive rubber bottom pad, (2) 4 mm non-insulated adapters, (6) AA batteries, and user manual.

SHOWN: 6526



**DataView®**  
6526, 6532 & 6534

## FEATURES\*

- True Megohmmeter®
- Test voltage from (10 to 1000) V
- Insulation resistance up to 200 GΩ
- Manual, Lock, Timer modes & PI/DAR Ratio calculations
- Alarms with Green/Red Pass/Fail indicator light
- 200 mA/20 mA continuity with active protection without fuses
- Measurement of V (TRMS & DC), F, Ω, kΩ, Hz, C
- ΔRel mode for comparison measurements
- Configurable alarms
- Data retrieval
- Automatic discharge after test
- Automatic test inhibit if device under test is energized > 25 V

\* Features are model dependent. Bluetooth on selected models.

# MEGOHMMETERS

## SELECTION CHART

AEMC MODEL NUMBER	AEMC CATALOG NUMBER	TEST VOLTAGE	INSULATION RANGE	RESISTANCE RANGE	CONTINUITY RANGE	CAPACITANCE RANGE	VOLTAGE DETECTION	POWER SOURCE	DISPLAY	DATAVIEW® SOFTWARE
6503	2126.52	250 V 500 V 1000 V	(1 to 500) MΩ (1 to 500) MΩ (10 to 5000) MΩ	-			600 V <sub>AC</sub>	Hand-cranked	Analog	No
6522	2155.51	250 V 500 V 1000 V	50 kΩ to 10 GΩ 100 kΩ to 20 GΩ 200 kΩ to 40 GΩ	-	10 Ω	-	700 V <sub>AC/DC</sub>	(6) AA Alkaline Batteries	Digital/ Analog	No
6527	2126.53	250 V 500 V 1000 V	1 kΩ to 4 GΩ 1 kΩ to 4 GΩ 1 kΩ to 4 GΩ	400 kΩ	400 Ω	—	600 V <sub>AC</sub> 1000 V <sub>DC</sub>	(6) AA Alkaline Batteries	Digital/ Analog	No
6529	2126.55	50 V 100 V 250 V 500 V 1000 V	(0.010 to 420) MΩ (0.020 to 420) MΩ (0.050 to 420) MΩ (0.100 to 4200) MΩ 0.20 MΩ to 11 GΩ	(0 to 420) kΩ	(0 to 40) Ω (200 mA test current ≤ 2 Ω)	-	700 V <sub>AC</sub> 700 V <sub>AC/DC</sub>	(6) AA Alkaline Batteries	Digital	No
6526	2155.53	50 V 100 V 250 V 500 V 1000 V	10 kΩ to 10 GΩ 20 kΩ to 20 GΩ 50 kΩ to 50 GΩ 100 kΩ to 100 GΩ 200 kΩ to 200 GΩ	1000 kΩ	10 Ω, 100 Ω	0.1 n to 10 μF	700 V <sub>AC/DC</sub>	(6) AA Alkaline Batteries	Digital/ Analog	Yes
6534	2155.55	10 V 25 V 100 V 250 V 500 V	2 kΩ to 1 GΩ 5 kΩ to 2 GΩ 10 kΩ to 10 GΩ 50 kΩ to 25 GΩ 100 kΩ to 50 GΩ	1000 kΩ	10 Ω, 100 Ω	-	700 V <sub>AC/DC</sub>	(6) AA Alkaline Batteries	Digital/ Analog	Yes
6536	2155.56	10 V	2 kΩ to 20 GΩ	1000 kΩ	10 Ω, 100 Ω	-	700 V <sub>AC/DC</sub>	(6) AA Alkaline Batteries	Digital/ Analog	No
6536 ESD Floor Kit	2155.57	100 V (variable in 1 V steps)								
1060	2130.03	50 V 100 V 250 V 500 V 1000 V	2 kΩ to 200 GΩ 4 kΩ to 400 GΩ 10 kΩ to 1 TΩ 20 kΩ to 2 TΩ 40 kΩ to 4 TΩ	400 kΩ	40 Ω	(0.005 to 4.999) μF	1000 V <sub>AC/DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	Yes
6505	2130.18	500 V 1000 V 2500 V 5000 V	10 kΩ to 2 TΩ 10 kΩ to 4 TΩ 10 kΩ to 10 TΩ 10 kΩ to 10 TΩ	-		(0.001 to 49.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	No
5050	2130.20	500 V 1000 V 2500 V 5000 V	10 kΩ to 2 TΩ 10 kΩ to 4 TΩ 10 kΩ to 10 TΩ 10 kΩ to 10 TΩ	-		(0.001 to 49.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	No
5060	2130.21	500 V 1000 V 2500 V 5000 V	10 kΩ to 2 TΩ 10 kΩ to 4 TΩ 10 kΩ to 10 TΩ 10 kΩ to 10 TΩ	-		(0.001 to 49.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	Yes
5070	2130.30	500 V 1000 V 2500 V 5000 V	10 kΩ to 2 TΩ 10 kΩ to 4 TΩ 10 kΩ to 10 TΩ 10 kΩ to 10 TΩ	-		(0.001 to 49.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Graphic/ Digital	Yes
6550	2130.31	500 V 1000 V 2500 V 5000 V 10,000 V	10 kΩ to 2000 GΩ 10 kΩ to 4000 GΩ 10 kΩ to 10,000 GΩ 10 kΩ to 15,000 GΩ 10 kΩ to 25,000 GΩ	-		(0.001 to 19.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	Yes
6555	2130.32	500 V 1000 V 2500 V 5000 V 10,000 V 15,000 V	10 kΩ to 2000 GΩ 10 kΩ to 4000 GΩ 10 kΩ to 10,000 GΩ 10 kΩ to 15,000 GΩ 10 kΩ to 25,000 GΩ 10 kΩ to 30,000 GΩ	-		(0.001 to 19.99) μF	2500 V <sub>AC</sub> 4000 V <sub>DC</sub>	Rechargeable NiMH Battery	Digital/ Analog	Yes

Consult factory for NIST Calibration prices