



Series BST-K-M lifting column construction tripod 28" - 66"
Part No. 08560

- Aluminum construction tripod with lifting column – exact positioning of the laser at the desired working height
- Lift system enables air-cushioned movement
- Tripod legs have spikes to insure good stability outdoors and rotatable hard rubber shoes to prevent scratches when used indoors
- Rapid locking mechanism
- 5/8" threaded screw

BM 100 & 300 tape measures



Length	10'	16'	26'	3 m / 10'	5 m / 16'	8 m / 26'
BM 100	30710	30716	30726	30810	30816	30826
BM 300	-	30516	30526	-	30616	30626


BM 100

- Compact pocket tape
- Ergonomic design
- Medium duty

BM 300

- Shatterproof ABS housing
- STABILA EASY-CLIP for easy attachment
- Heavy Duty

Series 600 folding rules

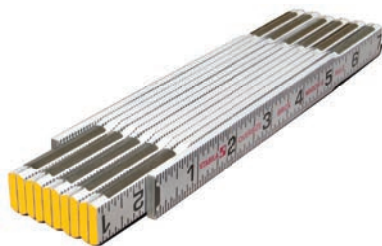

Type	Description	Part No.
Masons	1/16ths - both edges - outside	80001
Oversize Brick	1/16ths - both edges - outside	80005
Modular Spacing	1/16ths - both edges - outside	80010
Engineers	1/16ths - 1/10ths - 1/100ths	80015



BST-S construction tripod 39" - 63"

Part No. 07498

- Aluminum construction tripod
- Tripod legs have spikes to insure good stability
- Rapid locking mechanism for aligning quickly
- Spread stopper chain
- Carrying pouch for easy transport
- 5/8" threaded screw

LBM 1000 tape measures



- Rugged Y-reel tape measure with a scale in inches made of PC/ABS plastic protects the blade against shocks/impacts
- Ergonomic softgrip handle for comfortable handling
- STABILA SPIKES coating improves resistance to slipping on smooth surfaces and when measuring over long distances
- The eyelet integrated into the hook enables quick release

Length	50 m	100 m	165'	330'
LBM 1000	30920	30925	30930	30935

LBM 2000 tape measures



- Compact closed case tape
- Shatterproof PC/ABS case with a shock-absorbing softgrip exterior protects the blade against shocks and impact.
- Ergonomic softgrip handle for comfortable handling
- STABILA SPIKES coating improves resistance to slipping on smooth surfaces and when measuring over long distances
- The eyelet integrated into the hook enables quick release

Length	20 m	30 m	66'	100'
LBM 2000	30940	30945	30950	30955

- Hardened steel springs and steel joints ensure durability, smoothness and exact locking
- Fully sealed rivets with abrasion protection
- Large digits for better readability