

3 1/2" UTILITY GAUGE BRASS BOURDON TUBE AND SOCKET MODEL 35TL4

STANDARD FEATURES

- 3 1/2" dial size
- Brass bourdon tube and socket
- Brass movement
- Black steel case with chrome bezel
- 1/4" NPT bottom connection
- Accuracy: 3/2/3% per ASME B40.1 Grade B
- White scale with black graduations and numerals
Metric readings in blue
- Suitable for water, air, oil, gas or any medium not corrosive to copper alloys
- Siphon required for steam applications




MODEL 35TL ▶

STANDARD RANGES

| RANGE | CODE | FIGURES | GRADUATIONS |
|------------|------|----------------|---------------|
| 30"/0 VAC | P2 | 5" HG | 0.5" HG |
| 30"/0/15 | P3 | 10"HG / 5 PSI | 1"HG / .5 PSI |
| 30"/0/30 | P4 | 10"HG / 10 PSI | 1"HG / 1 PSI |
| 30"/0/60 | P5 | 10"HG / 10 PSI | 2"HG / 1 PSI |
| 30"/0/100 | P6 | 30"HG / 20 PSI | 5"HG / 2 PSI |
| 30"/0/150 | P7 | 30"HG / 20 PSI | 5"HG / 2 PSI |
| 0/15 PSI | PA | 2 PSI | 0.2 PSI |
| 0/30 PSI | PB | 5 PSI | 0.5 PSI |
| 0/60 PSI | PC | 10 PSI | 1 PSI |
| 0/100 PSI | PD | 20 PSI | 2 PSI |
| 0/160 PSI | PE | 20 PSI | 2 PSI |
| 0/200 PSI | PF | 40 PSI | 5 PSI |
| 0/300 PSI | PG | 50 PSI | 5 PSI |
| 0/400 PSI | PH | 50 PSI | 5 PSI |
| 0/600 PSI | PI | 100 PSI | 10 PSI |
| 0/1000 PSI | PK | 200 PSI | 20 PSI |

Note: Standard scales read PSI, KPA and BAR.

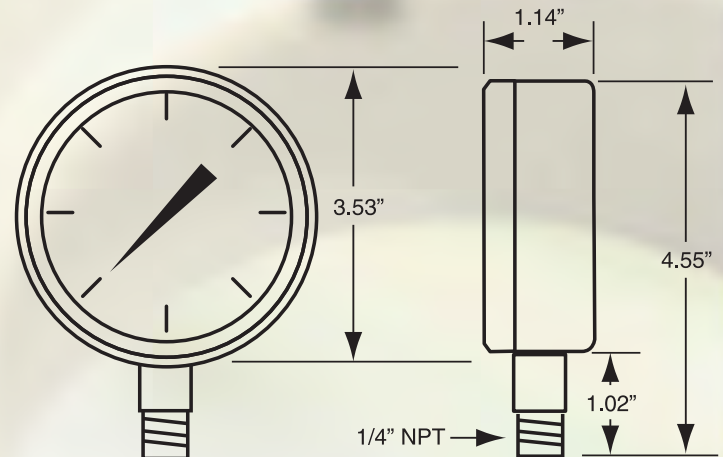

HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING:

| MODEL # | RANGE |
|--------------|--------------------------------|
| 35TL4 | 2 digit code from table |