


Vibration Transducer SLD122B /SLD122F

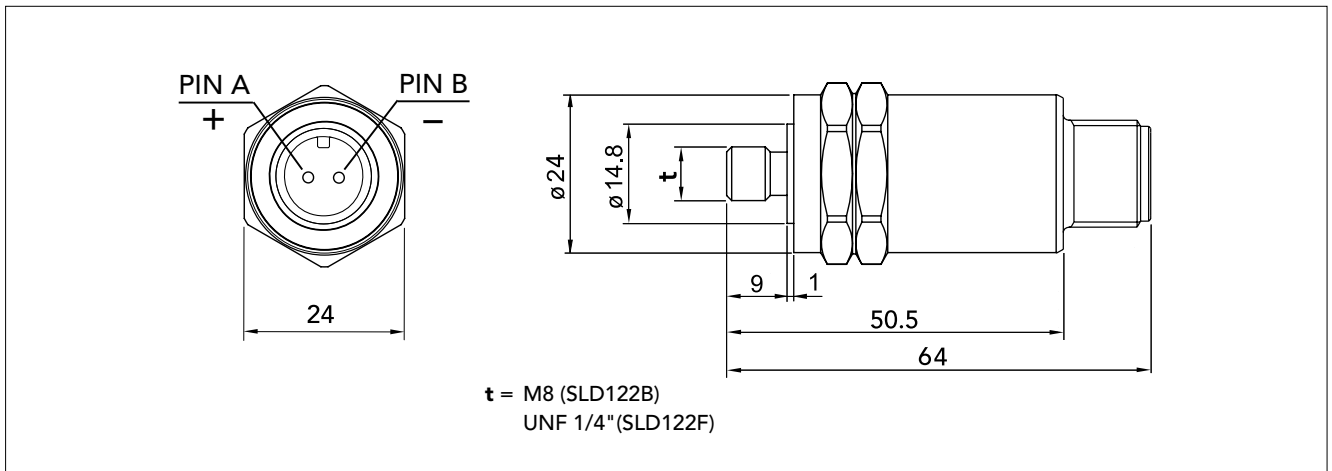

The vibration transducer SLD122B and SLD122F are piezo-electric accelerometers of compression type with built-in preamplifier, designed for vibration monitoring of industrial machinery. The electrical signal is isolated from the transducer housing.

The transducer is mounted against a smooth, flat surface on the machine. SLD122B has thread size M8 and SLD122F has thread size UNF 1/4". The transducer is connected via a twisted pair cable with 2 pin connector, compatible with 2 pin MIL-C-5015 style.

Technical data




| | |
|----------------------------------|---|
| Nominal sensitivity, main axis: | 4 mV/m/s ² * = 40 mV/g |
| Transverse sensitivity: | max. 10% |
| Typical base strain sensitivity: | 0.01 m/s ² /μ strain |
| Linear frequency range: | 2 to 5000 Hz (±1 dB) |
| Max. peak acceleration: | 600 m/s ² = 60 g |
| Settling time: | 3 sec |
| Bias point: | 6 to 9 V (typical 8 V) |
| Temperature range: | -40° C to +125° C (-40° F to 260° F) |
| Power requirements: | 12 to 24 V, 2 to 5 mA |
| Casing: | Stainless acid proof steel |
| Sealing: | IP 67 together with appropriate connector |
| Isolation: | Case isolated, > 1 Mohm |
| Torque limit: | 10 Nm (7.4 lbf·ft) |
| Weight: | 110 grams (4 oz) |
| Connector type: | Compatible with 2 pin MIL-C-5015 style |

* Individual value given on the calibration chart.

Mounting tools

- 81027 Holder for counterbore
- 81030 Pilot for UNF 1/4" (SLD122F)
- 81031 Pilot for M8 (SLD122B)
- 81057 Counterbore, diameter 20 mm

To drill the mounting hole, use drill bit 6.9 mm (5.5 for UNF 1/4"). Torque the transducer with a 24 mm torque wrench.

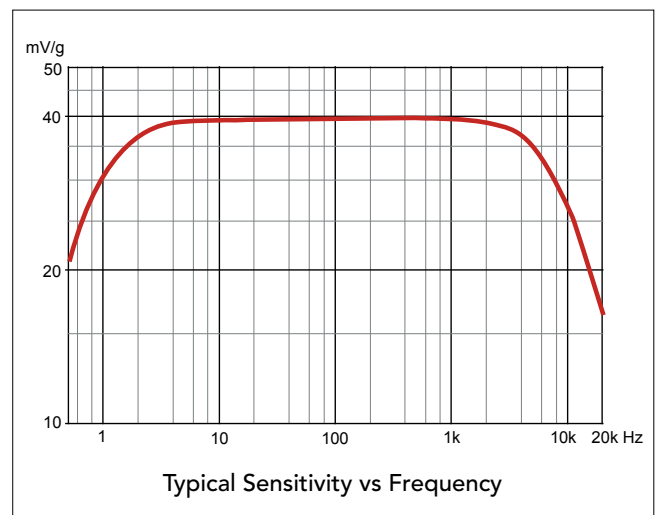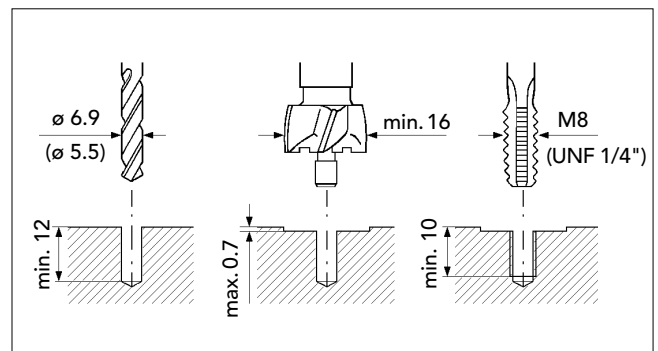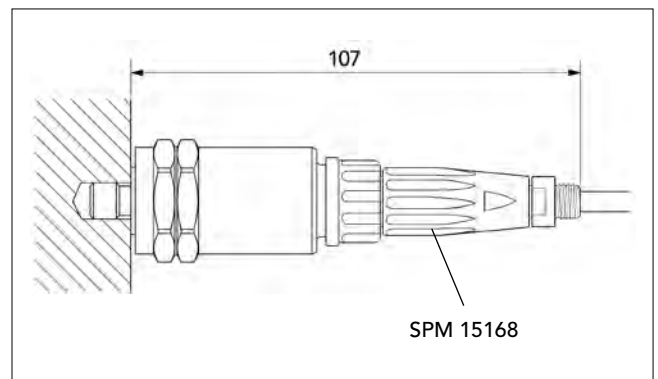

SPM

1.800.561.8187

www.itm.com

information@itm.com