


USB Sound Level Datalogger

High accuracy datalogging of up to 129,920 records
Designed to meet ANSI and IEC 61672 Class 2 standards

Features:

- USB interface for easy setup and data download
- 30 to 130dB range
- Datalogging capability up to 129,920 records
- Selectable data sampling rate
- Records readings with real time clock
- Two start methods: programmed (from PC) or manual
- 0.5" electret microphone
- Includes 3.6V Lithium battery, Windows[®] compatible software, USB cover, tripod, USB extension cable, and windscreen

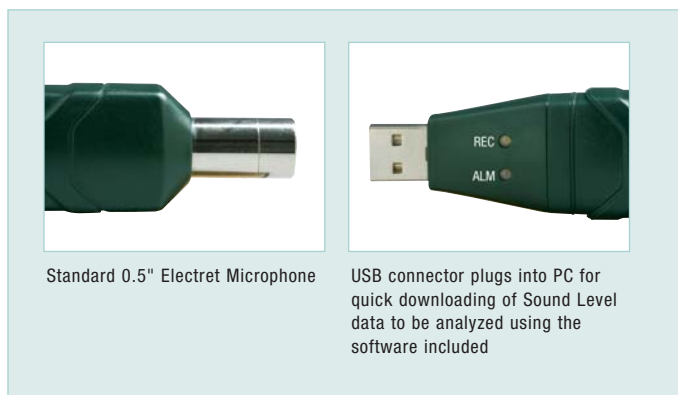

| Specifications | |
|-----------------|------------------------------------|
| Range | 30 to 130dB |
| Frequency Range | 31.5 to 8kHz |
| Basic accuracy | ±1.4dB |
| Weighting | A and C |
| Response Time | Fast (125ms)/Slow (1s) |
| Datalogging | 129,920 points |
| PC Interface | USB |
| Dimensions | 5.1 x 1.1 x 0.9" (130 x 30 x 25mm) |
| Weight | 1oz (20g) |

Ordering Information:

407760USB Sound Level Datalogger
407760-NISTL ...USB Sound Level Datalogger with NIST Certificate (single point)
422993.6V Lithium Battery (pkg of 2)

