

P/N: 4142573

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 4142573

Release:

Commit: 44954

Language: en-US

Modified: 2017-09-13

Formatted: 2017-09-21

Website


<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.

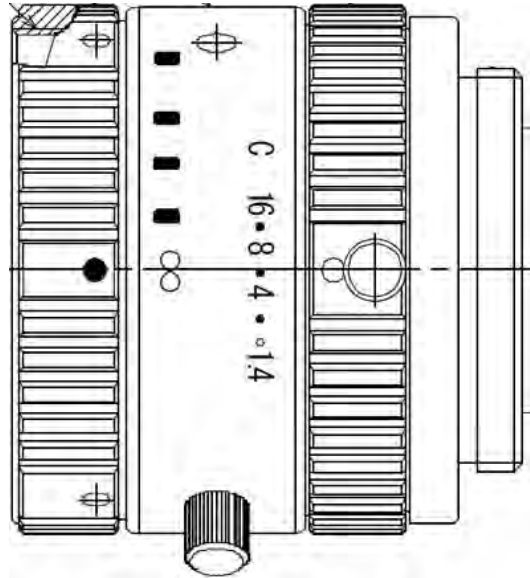

Specifications	
Spectral band	0.9-1.7 microns
Focal length	16 mm
f /number	1,4
Average Transmission	75%
Distortion	0,50%
Focus range without vignetting	0.3 m to Infinity
Operating temperature	-10 to +50°C
Storage temperature	-20 to +60°C
Weight	0.06 kg (0.13 lbs.)
Deg. Horizontal field of view (A626Xsc)	33,4
Deg. Vertical field of view (A626Xsc)	27,0
Deg. Diagonal field of view (A626Xsc)	42,0
Deg. Horizontal field of view (A620Xsc, SC620X)	53,1
Deg. Vertical field of view (A620Xsc, SC620X)	43,6
Deg. Diagonal field of view (A620Xsc, SC620X)	65,3
Interface	C-Mount

Compatible with the following products:

