



# FLIR GF343


## Optical Gas Imaging Camera

The GF343 is an optical gas imaging camera that lets you see CO<sub>2</sub> leaks quickly, easily, and from a safe distance. Whether CO<sub>2</sub> is a byproduct of a production process, a trace gas used to detect leaks from power generators, or part of an Enhanced Oil Recovery program, fast and accurate detection of CO<sub>2</sub> leaks is key to keeping your operation running safely, efficiently, and profitably.

### Visualize Hydrogen Gas Leaks in Real Time

*Use safer CO<sub>2</sub> as tracer gas to localize leaks and verify repairs quickly, easily, and reliably*

- Find H<sub>2</sub> leaks in turbine generators by adding a small amount of CO<sub>2</sub> as a tracer. Inspections can be performed during operations with 3-4% CO<sub>2</sub> to maintain > 95% H<sub>2</sub> purity.
- Visualize the source of CO<sub>2</sub> leaks in Enhanced Oil Recovery (EOR) operations
- Discover CO<sub>2</sub> losses in a variety of industrial manufacturing, transportation, and storage uses

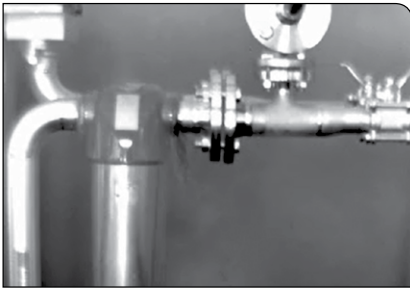

Spot hard-to-find CO<sub>2</sub> leaks

### Decreases Downtime and Saves Money

*Detect CO<sub>2</sub> as a predictive maintenance tool to prevent downtime and inventory loss*

- Find and repair leaks sooner to avert unplanned outages
- Fast, non-contact survey method allows for inspections while equipment remains on-line
- Avoid expensive regulatory fines and loss of valuable inventory



See even more with High Sensitivity Mode (HSM)

### Improve Operations Safety and Protect the Environment

*Keep facilities safe while working towards a carbon-neutral operation*

- Improve efficiencies of EOR operations
- Stop leaks in carbon capture and storage operations
- Visually verify completed repairs so operations can continue safely



Leak in a 4-way valve dryer skid



The World's **Sixth Sense**™

## Specifications

<b>Model</b>	<b>GF343</b>
Detector Type	Focal plane array, cooled InSb
Spectral Range	4.2 – 4.4 $\mu\text{m}$
Resolution	320 x 240 pixels
Detector Pitch	30 $\mu\text{m}$
NETD/Thermal Sensitivity	< 15 mK @ +30°C (+86°F)
Sensor Cooling	Stirling Microcooler (FLIR MC-3)
<b>Electronics / Imaging</b>	
Image Modes	IR image, visual image, High Sensitivity Mode (HSM)
Frame Rate (Full Window)	60 Hz
Dynamic Range	14-bit
Video Recording / Streaming	Real-time non-radiometric recording: MPEG4/H.264 (up to 60 min./clip) to memory card Real-time non-radiometric streaming: RTP/MPEG4
Visual Video	MPEG4 (25 min./clip) to memory card
Visual Image	3.2 MP from integrated visible camera
GPS	Location data stored with every image
Camera Control	Remote camera control via USB
<b>File Storage</b>	
Storage Media	Removable SD or SDHC memory card; two card slots
Image Storage Capacity	> 1200 images (JPEG) with post-process capability per GB on memory card
<b>Optics</b>	
Camera f/number	f/1.5
Available Fixed Lenses	14.5° (38 mm), 24° (23 mm)
Focus	Automatic (one touch) or manual (electric or on the lens)
<b>Image Presentation</b>	
On-Camera Display	Built-in widescreen, 4.3 in. LCD, 800 x 480 pixels
Automatic Gain Control	Continuous/manual, linear, histogram
Menu Commands	Level/span, auto adjust continuous/manual/semi-automatic, zoom, palette, start/stop recording, store image, playback/recall image
Color palettes	Iron, Gray, Rainbow, Arctic, Lava, Rainbow HC
Zoom	1-8x continuous, digital zoom
<b>General</b>	
Operating Temperature Range	-20°C to +50°C (-4°F to +122°F)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Encapsulation	IP 54 (IEC 60529)
Bump / Vibration	25 g (IEC 60068-2-27) / 2 g (IEC 60068-2-6)
Power	AC adapter 90-260 VAC, 50/60 Hz or 12 V from a vehicle
Battery System	Rechargeable Li-ion battery
Weight w/ Battery & Lens	2.48 kg (5.47 lb.)
Size (L x W x H) w/ Lens	306 x 169 x 161 mm (12.0 x 6.7 x 6.3 in.)
Mounting	Standard, 1/4"-20

NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice.  
©2015 FLIR Systems, Inc. All rights reserved. [Rev.11/15]



The World's Sixth Sense™

1.800.561.8187

www.itm.com

information@itm.com