

Traceable® Lollipop™ Shock/Water-Resistant Thermometer

Featherweight, wide-range lab partner covers
99% of routine temperature measurement needs

Traceable® Shock/Water-Resistant unit delivers reading
updates every second

- Thermometer replaces hazardous mercury units and is ideal for wet labs, wash-down areas, outdoors and virtually all field applications
- Shockproof in drop tests up to 5 feet
- Wide range covers 99 percent of the lab's routine temperature measurements

Features:

- Water-resistant and Shock-resistant
- One-key operation recalls MIN/MAX temperature results
- °F/°C switchable
- Bright ¼-inch-high display is easy to view
- Individually serialized, calibrated, and certified Traceable® to NIST

Additional features:


- Probe: 0.14" diameter, 8" length
- Probe cover doubles as a probe holder
- Case is high-impact, chemical-resistant ABS plastic

Traceable to NIST for accuracy

Multi-point calibration on an individually-numbered Traceable® Certificate which assures accuracy from our ISO/IEC 17025:2005 (1750.01) calibration laboratory accredited by A2LA. It indicates traceability of measurements to the SI units through NIST or other recognized national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Agreement.

Cat. No. 4371 Traceable® Lollipop™ Shock/Water-Resistant Thermometer

Cat. No. 4378 Traceable® Ultra™ Lollipop™ Shock/Water-Resistant Thermometer

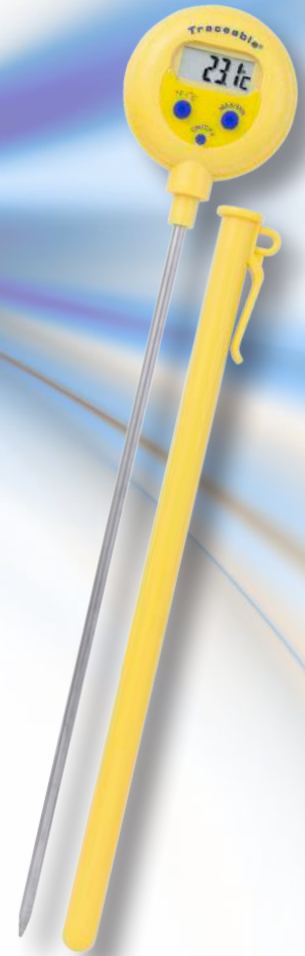

Product Specifications

- ▶ **Range:** -50 to 300°C (-58 to 572°F)
- ▶ **Resolution:** 0.1° from -20 to 200°C; or 1°C elsewhere
- 4371—
 - ▶ **Accuracy:** ±1°C between -30 and 250°C; otherwise ±3°C
- 4378—
 - ▶ **Accuracy:** ±0.4°C at tested points, ±1°C between 0 and 100°C otherwise
- ▶ **Probe:** 0.14" diameter, 8" length
- ▶ **Dimensions:** 10¼ x 1¼ x ½"
- ▶ **Weight:** ⅞ ounces
- ▶ **Supplied:** battery, probe, probe cover with pocket clip, Traceable® Certificate



1.800.561.8187

www.itm.com

information@itm.com