


VARIO *luxxx* SYNGAS

PORTABLE SYNGAS ANALYZER
for monitoring of syngases
at various industrial sites

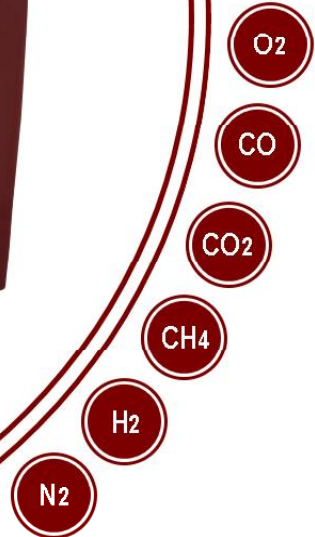

Suitable for semi-continuous measurements of "syngas" from:

- **Steel industry: coke oven gas / blast furnace gas**
- **Biomass or coal catalytic oxidation (gasification)**
- **Waste gasification - plasma gasification process**
- **Steam reforming of liquid hydrocarbons (refinery gas ect.)**



since 1984 ®

AIR fair
EMISSION MONITORING SYSTEMS

Over 20 years of experience in industrial

1.800.561.8187

www.**itm**.com

information@itm.com

VARIO

luxxx SYNGAS

TECHNICAL SPECIFICATIONS

VARIO luxx - SYNGAS

Portable analyzer with O2 - CO - CO2 - CH4 - H2 and H2S

Measurement components	Method	Meas. range (0...min / max) *	Resolution	Accuracy **
O2 Oxygen (long-Life)	ECS	0 ... 25.00 %	0.01%	0.2%
O2 Oxygen	PM	0 ... 25.00 %	0.01%	0.1%
H2 Hydrogen	TCD	0 – 10% / 30% / 100%	0.01%	± 0.2 % / 2% measuring value
CO Carbon monoxide	NDIR	0 ... 100 %	0.01%	± 0.1 Vol %
CO2 Carbon dioxide	NDIR	0 ... 100 %	0.01%	± 0.3 Vol %
CH4 Methane	NDIR	0 ... 100 %	0.01%	± 0.2 Vol %
H2S Hydrogen sulfide	ECS	0 ... 2,000 / 5,000 ppm	1 ppm	±5 ppm or 5% of reading

* overload range of ECS is usable only for short duration

** which ever is larger

*** with hourly zeroing

Calculated components

Calorific value 0 ... 50 MJ/m³ or MJ/kg

N2 balance difference to 100%

GENERAL TECHNICAL DATA

Operating system	LINUX
Display, operation	7" TFT (800 x 480 px) color display, backlit, with touch and swipe operation
Data storage type	10,000 data sets internal and external USB-Stick
Interface to PC / Notebook	Ethernet, Bluetooth, WLAN, RS485
Data transfer over cable / wireless	RS485, RJ45 (Ethernet) / Bluetooth, WLAN
Analog output 4 ... 20 mA	8 channel, user free configurable
Analog input 4 ... 20 mA	4 channel, user free configurable
Universal analog input - AUX	0 ... 10 Vdc / 4 ... 20 mA / K-type / RS485
Mains free operation	Li-Ion, 48 Wh, for appr. 1 hr „stand-by“ (optional additional battery, 48 Wh Li-Ion)
Operating temperature	41°F ... 122°F; RH up to 95 % not condensing
Storage temperature	-4°F ... 122°F
Power supply	86 ... 265 Vac / 47 ... 63 Hz / 105 W (up to 600 W with heated sampling line)
Protection class	IP20 (or IP42 inside transport case)
Dimensions	(W x H x D) 16.92" x 11.41" x 5.9" (430 x 290 x 150 mm)
Weight	appr. 16.5lbs (7.5 kg), for minimal configuration



Portable SYNGAS washing device



Gas sampling probe with heated filter and heated sampling line for use at raw (dirty) SYNGAS with heavy hydrocarbons or tar

Data subject to change without notice

Support and sales by:



1.800.561.8187

www.itm.com

information@itm.com