

8 and 11 Pin Sockets, Standard and Finger-Safe, Surface or DIN-Rail Mountable

ELECTRICAL RATING

API 008 600 Volts, 10 Amps
 API 008 FS, API 011, API 011 FS 300 Volts, 10 Amps

CONSTRUCTION

Contacts Brass, Nickel Plated
 Screws Binder Head, 6-32 x 1/4" Steel Zinc Plated
 Pressure Clamp, 6-32 x 5/16" Steel, Zinc Plated
 Wire Range #12 to #22 AWG Solid or Stranded
 Screws, FS Box Lug, M3 Steel, Nickel Plated
 Maximum Wire Gauge #14 AWG
 Molding Black Break-Resistant Thermoplastic

AGENCY APPROVALS

Standard Models UL recognized File No. E60008
 FS models UL recognized File No. E113714
 Standard Models CSA certified File No. LR29513
 FS models CSA certified File No. LR26716
 All Models CE

SOCKETS


API 008
 API 008 FS
 API 011
 API 011 FS

DESCRIPTION


8 Pin Octal
 8 Pin Octal, Finger Safe
 11 Pin Octal Style
 11 Pin Octal Style, Finger Safe




API Sockets API 008 and API 008 FS

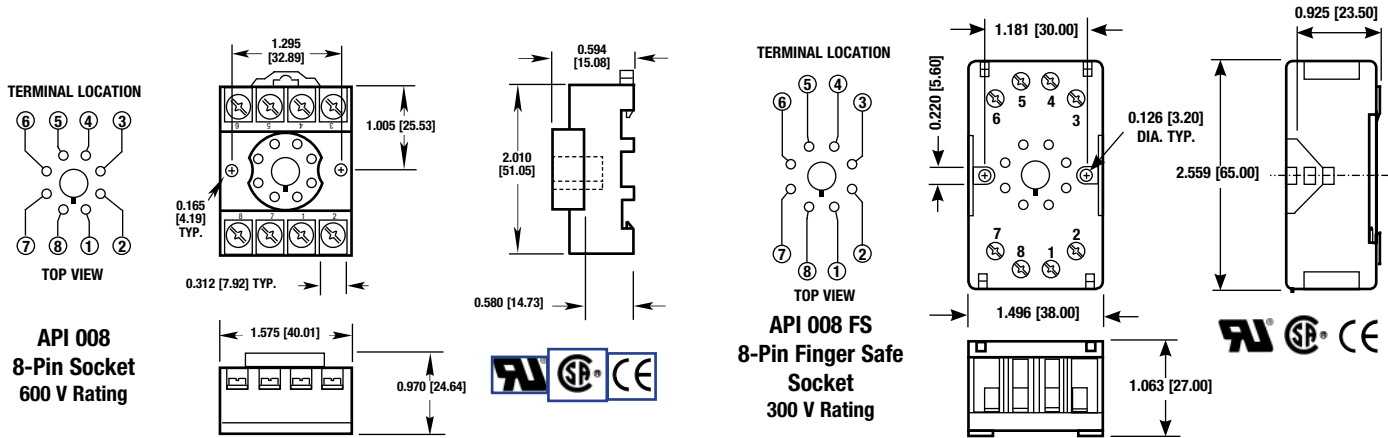


API 011 and API 011 FS Sockets

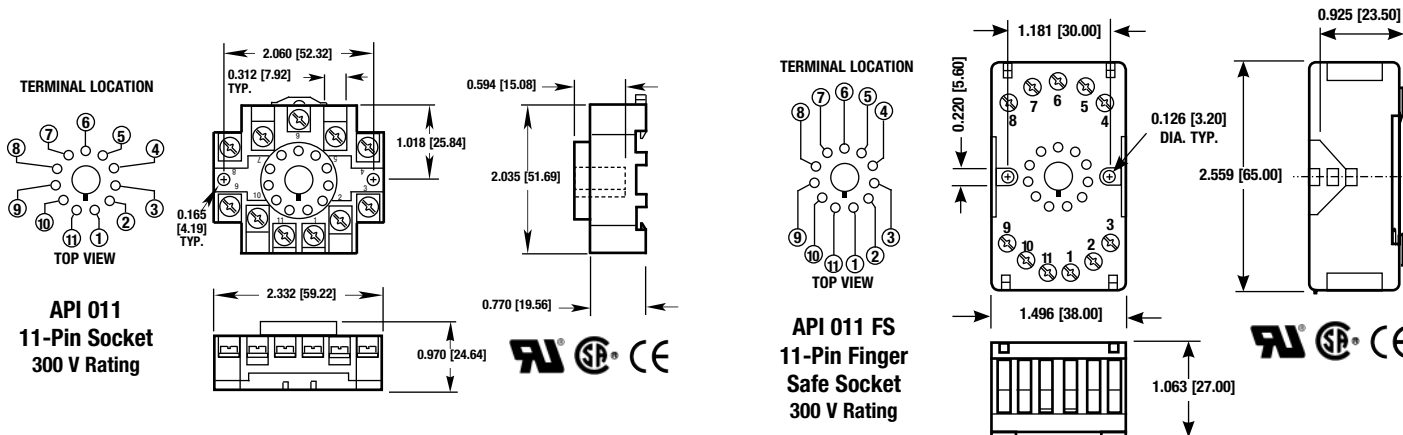

Model	Description
API 008	8-pin socket, DIN rail or surface mount
API 008-5A	8-pin socket, DIN rail or surface mount, with 5 A current shunt, 0.1 Ω 25W 1% shunt resistor
API 008 FS	8-pin socket, finger-safe, DIN rail or surface mount
API 011	11-pin socket, DIN rail or surface mount
API 011-5A	11-pin socket, DIN or surface mount, with 5 A current shunt, 0.1 Ω 25W 1% shunt resistor
API 011 FS	11-pin socket, finger-safe, DIN rail or surface mount
API CLP1	Hold-down spring for API 008, API 008 FS, API 011 or API 011 FS
API BP4	4-pin plug for DIN housing. Each

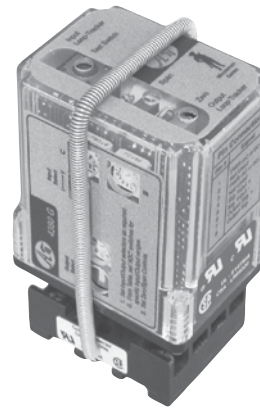

API CLP1
Hold-down spring for API 008, API 008 FS, API 011 or API 011 FS sockets

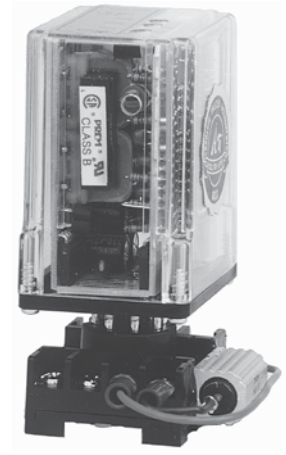

API 008-5A
Socket with current shunt


API maintains a constant effort to upgrade and improve its products. Specifications are subject to change without notice. See api-usa.com for latest product information. Consult factory for your specific requirements.





WARNING: This product can expose you to chemicals including lead and nickel, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

API 008-05A Socket with Shunt

TERMINAL LOCATION




TOP VIEW





API 008-5A
8-Pin Socket/Shunt
600 V Rating

API 011-05A Socket with Shunt

TERMINAL LOCATION



TOP VIEW

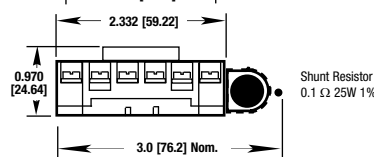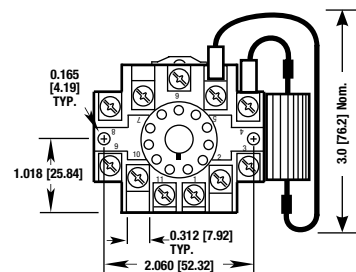

API 011-05A
11-Pin Socket/
Shunt
300 V Rating

Shunt Resistor
0.1 Ω 25W 1%