


Series CAM

Compressed Air Meter

Steady-State and Cumulative Totals PNP/4-20 mA Output



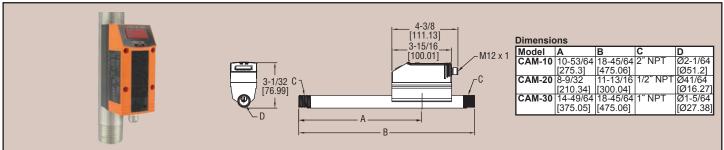

The Series CAM Compressed Air Meter operates by the calorimetric measuring principle to detect the standard volume flow of operating compressed air. It is designed specifically to evaluate the current flow rate and the current consumed quantity in compressed air systems. With an easily programmable digital display, this unit offers a quick, accurate readout. The Series CAM is constructed of high-grade materials and is virtually maintenance free.

Model CAM-10, 2" NPT, 1.4 - 412.0 SCFM Model CAM-20, 1/2" NPT, 0.2 - 44.1 SCFM Model CAM-30, 1" NPT, 1.0 - 132.4 SCFM

ACCESSORY A-283, 4-Wire Connector

	Max. Oil Content	Max. Residual Dust		Max. Residual Water	
	Oil	Dust	Particle	Residual	Pressure
	Content	Concentration	Size	Water	Dew Point
Class	mg/m³	mg/m³	mg/µm	g/m³	°C
1	0.01	0.1	0.1	0.003	-70
2	0.1	1	1	0.117	-40
3	1	5	5	0.880	-20
4	5	8	15	5.953	+3
5	25	10	40	7.732	+7
6	_	_	_	9.356	+10

SPECIFICATIONS

Service: Compressed air; Air quality (see chart).

Wetted Materials: SS (304S15), ceramics, glass passivated, PEEK, polyester, fluoroelastomer, anodized aluminum.

Accuracy: Class 1.4.1: ±3% of measured value +0.3% of full-scale value; Class 3.4.4: ±6% of measured value + .6% of full-scale value.

Response Time: < 0.1 s.

Temperature Limit: 32 to 140°F (0 to 60°C).

Pressure Limit: 232 psig (16 bar). Humidity Limit: 90% RH.

Power Requirements: 19-30 VDC.

Output Signal: Output 1: PNP open collector: VOUT(max)=30 VDC / ISINK(max)=250mA; Output 2: 4-20 mA (scaleable) or PNP open collector.

Loop Resistance: 500 Ω .

Current Consumption: < 100 mA.

Electrical Connections: 4 pin M12 (micro) cable connection.

Process Connections: 1/2", 1" and 2" NPT. Display: 4-digit alpha numeric red LED. Enclosure Rating: IP66 (NEMA 4X).

Mounting Orientation: Vertical, horizontal, side with pipe length facing left.

Weight: CAM-10: 12.5 lb; CAM-20: 2.35 lb; CAM-30: 4.16 lb.

Agency Approvals: CE.