




## SELECTABLE FLOW NOZZLE

# MultiFlow Large

### Selectable flow nozzle

- Body in hard anodized Aluminum
- Wide flow handle and wide ring for flush setting
- Adjustment of the full jet to the optimal spray angle in 155°
- Stainless steel ball valve
- Powerful full cone spray for smothering flames.
- Unbreakable rubber teeth: **No maintenance**
- **Polyurethane Bumper:** resistant to high temperatures, hydrocarbons and aggressive chemicals

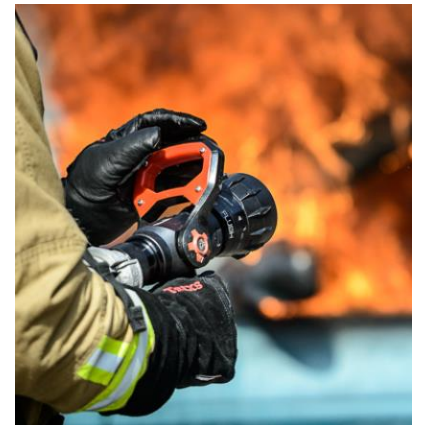

**Leader Nozzles are available in 3 different sizes:**



As part of our policy of constant research to improve our products, we reserve the right to modify our products' characteristics at any time without notice



## Characteristics

Model	Item number	Weights	Flowrates	Pressures	Inlets
MultiFlow 200	LMA-005-RI	7.05 lbs 3.200 kg	95-125-150-200GPM	100 PSI	1.5" NH F
	LMA-005-SI	7.38 lbs 3.350 kg			2.5" NH F
MultiFlow 250	LMA-007-SI		125-150-200-250GPM		

## Dimensions

L. 35 x W. 13 x H. 26cm

## Curve: Flow vs Pressure

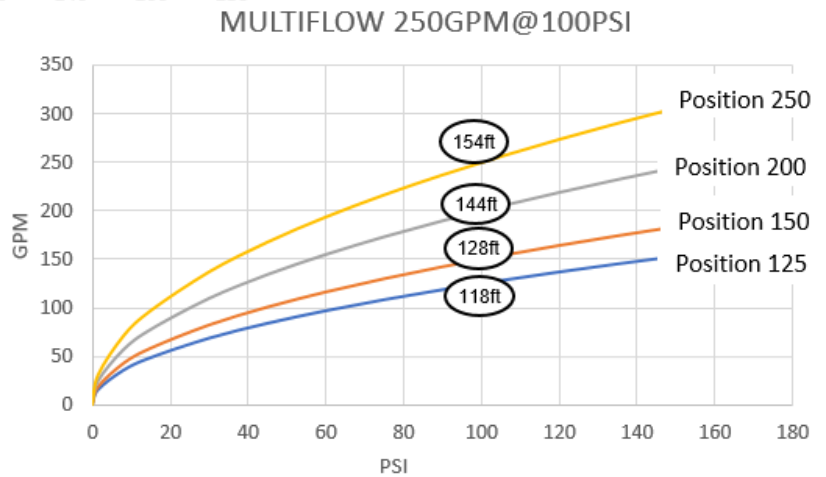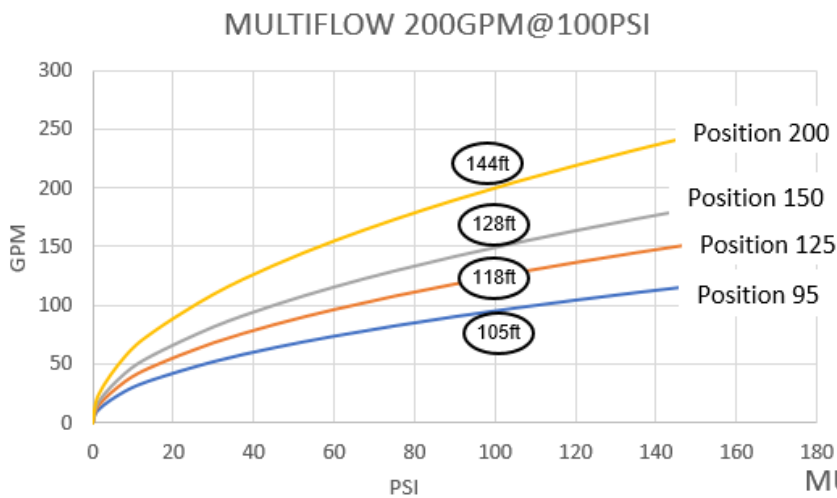

## Options

All coupling types

Foam adapter

Coloured (red, blue, yellow, green, orange) flow control handle and pistol grip covers (MultiFlow are delivered as standard with red covers)

## Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



7F 01 301 IIS 1

1.800.561.8187

www.itm.com

information@itm.com