


The magnet sensors are designed to measure the surface temperature of ferrous metals with a convenient and non-destructive magnetic attachment. These sensors are designed to be mounted either vertically or horizontally and may be attached to molding press platens, bearing/motor housings and various other metal surfaces. These sensors provide stabilized temperature readings in less than 5 seconds. The magnet sensors have a continuous operating temperature of 400 °F. The T1 and H1 series can take intermittent temperatures up to 600 °F, but the pull of the magnet will be degraded at temperatures above 450 °F. The M1 series has a 2 lb. pull force magnet and the T1 and H1 series have a 16 lb. pull force magnet.

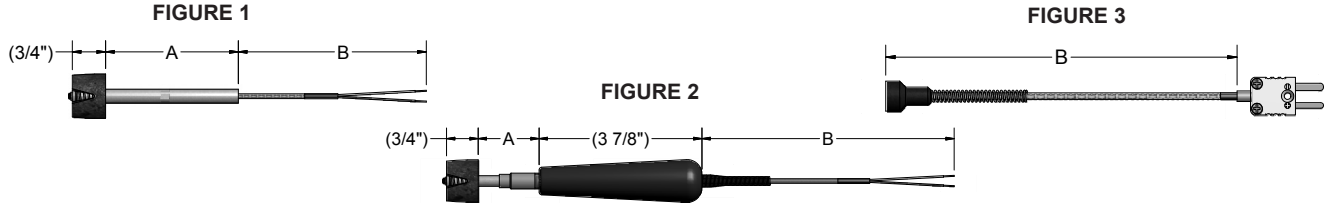

ORDER CODES

Example Order Number:

JMAG - T - 006 - 304 - T1B072 - 2

1 Thermocouple Types

CODE	DESCRIPTION
JMAG	Type J magnet sensor
KMAG	Type K magnet sensor

2 Magnet Assembly Styles

SHEATH STYLE (FIGURE 1)

CODE	DESCRIPTION
T ^[1]	16 lb. Pull magnet with 5/16" O.D. sheath

PHENOLIC HANDLE STYLE (FIGURE 2)

CODE	DESCRIPTION
H ^[2]	16 lb. Pull magnet with handle

MINIATURE STYLE (FIGURE 3)

CODE	DESCRIPTION
M ^[3]	2 lb. Pull magnet

[1] 3 inch minimum "A" dimension

[2] 1 inch minimum "A" dimension

[3] No "A" Dimension required-specify as 000

3 "A" Dimension

Specify 3 digit "A" Dimension length in inches.

4 Bend Options^[1]

CODE	DESCRIPTION
00	No Bend
2__	Sheath bent 45°
3__	Sheath bent 90°

[1] Only available with "T" style magnet sensor. Requires a minimum "A" dimension of 4 3/4 inches.

5 Extension Leadwire Type

CODE	DESCRIPTION
F1	Fiberglass insulation-solid conductor
F1B	Fiberglass insulation-solid conductor-stainless steel overbraid
F1A ^[1]	Fiberglass insulation-solid conductor-flexible armor
F3	Fiberglass insulation-stranded conductor
F3B	Fiberglass insulation-stranded conductor-stainless steel overbraid
F3A ^[1]	Fiberglass insulation-stranded conductor-flexible armor
T1	Teflon [®] insulation-solid conductor
T1B	Teflon [®] insulation-solid conductor-stainless steel overbraid
T1A ^[1]	Teflon [®] insulation-solid conductor-flexible armor
T3	Teflon [®] insulation-stranded conductor
T3B	Teflon [®] insulation-stranded conductor-stainless steel overbraid
T3A ^[1]	Teflon [®] insulation-stranded conductor-flexible armor

[1] Not available with M1 series assembly

6 Terminations and Options

CODE	DESCRIPTION
0	Leads not stripped
2	2" split leads, 1/4" stripped
3	2" split leads with spade lugs
4	Standard plug
5	Standard jack
6	Miniature plug
7	Miniature jack
8	2" split leads with 1/4" quick-disconnect female terminal lugs

Options

CODE	DESCRIPTION
MC	Mating Connector
CC	Connector secured to leads with cable clamp
BX	1/2" NPT junction box connector

Teflon[®] is a registered trademark of E. I. du Pont de Nemours and Company.